


HS 50

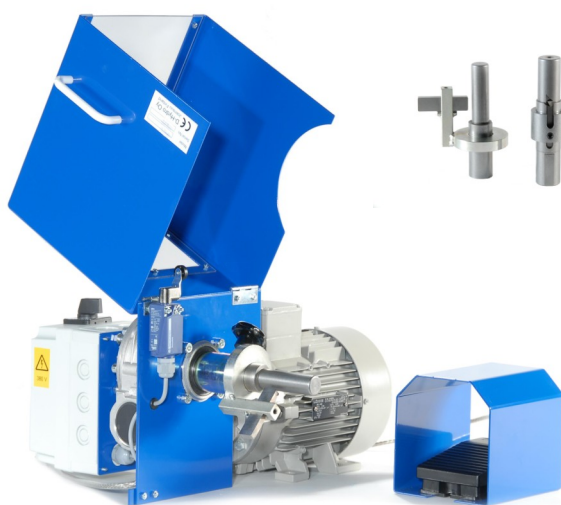

SPÉCIFICATIONS

Capacité	2" (interne & externe)
Motorisation standard	1,1 kW 380V 3-Ph
Motorisations différentes disponibles sur demande	
Contrôle	Pédale
Vitesse de la lame (rpm)	150
Poids (kg)	25
Dimensions (LxPxH mm)	460 x 490 x 270

TÊTES DE DÉNUDAGE

Externe	Portée (mm)
3/16"	0-55
1/4"	0-55
5/16"	0-55
3/8"	0-55
1/2"	0-55
5/8"	0-55
3/4"	0-55
1"	0-55 / 50-90
1 1/4"	0-55 / 50-90
1 1/2"	0-55 / 50-90
2"	50-90
Interne	Portée
3/8"	adaptable ↔
1/2"	adaptable ↔
5/8"	adaptable ↔
3/4"	adaptable ↔
1"	adaptable ↔
1 1/4"	adaptable ↔
1 1/2"	adaptable ↔
2"	adaptable ↔